

MODIFICATION OF SURFACE MODIFIER

Publication number: JP2508554 (B2)
 Publication date: 1996-06-19
 Inventor(s): KADOWAKI SATORU, SUZUKI MAKOTO, OKAMOTO KUNIO
 Applicant(s): NIPPONDENSO CO LTD, NIPPON DENSO CO
 Classification:
 - International: C08K5/54; C08K5/55; C08K9/00; C08K9/02; C08K9/06; C09D5/00; C09D183/00; C09J5/00; C09J5/02; D06M13/02; D06M13/50; D06M13/51; D06M13/513; D06M23/00; D06M101/00; D06M101/40; C08K5/00; C08K9/00; C09D5/00; C09D183/00; C09J5/00; C09J5/02; D06M13/00; D06M23/00; (IPC1-7): C09D183/00; C08K5/54; C08K9/00; C08K9/06; C09D5/00; C09J5/00
 - European:
 Application number: JP19910142486 19910517
 Priority number(s): JP19910142486 19910517

Also published as:

JP4342746 (A)

Cited documents:

JP61057663 (A)

JP3072551 (A)

JP61275385 (A)


JP2018463 (A)

JP64000126 (A)

more >>

Abstract of JP 4342746 (A)

PURPOSE: To obtain a surface modifying component having excellent surface treating ability free from formation of by-product during surface treatment. CONSTITUTION: For example, a silane coupling agent, a surface improving agent, is hydrolyzed with water, an alcohol as a by-product is removed from the reaction solution to give a surface modifying component. The surface modifying component is used as an improved surface modifier.

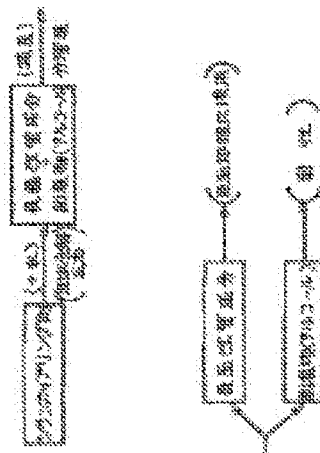

Data supplied from the esp@cenet database — Worldwide